



LuOcean Mini 8 Diode Laser @ 670 nm - 1940 nm up to 130 W



Description:

The Lumics LuOcean Mini 8 diode laser series offers OEM integrators an excellent product to manufacture state-of-the-art end-user laser systems.

The easy integration and safe use of these laser components in combination with several accessories and features give the chance to be cost-efficient in development and manufacturing.

Features & Functions:

- Up to four wavelengths
- 105µm - 1000 µm NA 0.22 fiber
- Emitter electrically in series
- Temperature sensor
- Pilot intensity (voltage controlled)

Options:

- Exchangeable window
- Red or green pilot
- Fiber sensor
- Power monitor
- OEM LD driver


Benefits:

- Single emitter long lifetime
- Passive cooling
- Sealed housing
- Small foot print
- SMA connector

Applications:

- Therapeutic
- Dental
- Dermatology
- Veterinary
- Pumping

Module Drawing (Dimensions in mm)

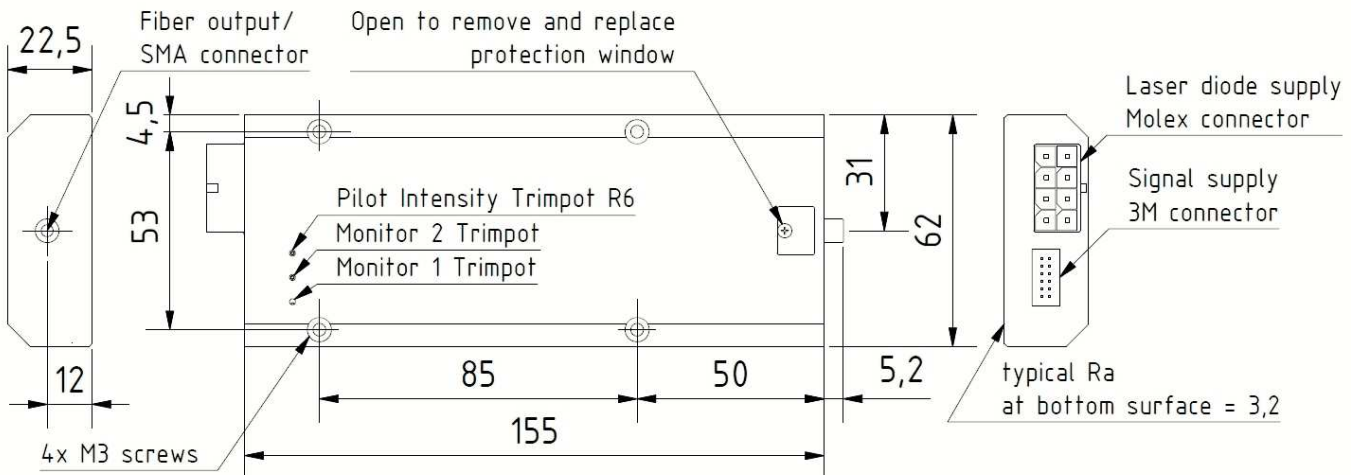

Connector - laser diode supply

MolexTM connector (Part No. 172064-0008).


Pin connection dependant on individual electro-optical configuration. Maximum current per pin is 26 A if total current to cathode exceeds 26 A two pins must be connected to cathode of driver board

Counterparts for external cable

Molex Mega-Fit Receptacle Housing Part No. 171692-0108

Molex Mega-Fit Female Crimp Terminal

Part No. 76823-0322



Connector - signals

Connector with locking on laser module Part No. Molex 87833-1231

Counterpart for external cable

Molex Milli Grid Cable to Board Receptacle

Part No. 87568-1273 with locking ramp.

Flat ribbon cable with pitch of 1mm and AWG28

Pin Configuration

Pin	Configuration
1	wavelength x (+ or -) depending on configuration
2	wavelength x (+ or -) depending on configuration
3	wavelength x (+ or -) depending on configuration
4	wavelength x (+ or -) depending on configuration
5	wavelength x (+ or -) depending on configuration
6	wavelength x (+ or -) depending on configuration
7	wavelength x (+ or -) depending on configuration
8	wavelength x (+ or -) depending on configuration

Pin Configuration

Pin	Configuration
1	Vcc (11-13)V to Fiber Sensor & Monitor Photo Diode
2	Fiber Sensor 1 Out (0 - (Vcc-0.7)V) (*)
3	GND1
4	Fiber Sensor 2 Out (0 - (Vcc-0.7)V) (*)
5	Monitor Photo Diode 1 Out (0-4(**))V (*)
6	Pilot Supply (5 V red, 8 V green) (*)
7	Monitor Photo Diode 2 Out (0-4(**))V(*)
8	Pilot GND2
9	NTC / PT100 / LM35 Supply 5V (*)
10	Pilot intensity control In (0-5)V (*)
11	NTC / PT100 / LM35 Signal (*)
12	No connection

* optional, ** maximum of 0.5V only for 19xxnm

We manufacture diode lasers.

Typical laser specifications at 25°C (*)

Wavelength at Pop [nm]	Fiber Diameter [μm]	max. Power Pop [W]	Operating Current [A] / Operating Voltage [V]
670	200	14	3.5 / 17
785/808	105	15	4 / 14
785/808	200	38	7 / 14
808	400	55	11 / 14
785/808	600	65	13 / 14
890	200	75	15 / 14
915/940/975	105	45	11 / 13
940/975	200	90	15 / 13
915/940/975	400	130	25 / 13
1064	200(400)	75(120)	15 / 12 (24 / 12)
1470	200	34	12 / 9.7
1470	400	45	21 / 9.7
1940	200(400)	10(14)	7.5 / 8 (11 / 8)
808 & 1064 (dual)	200	19 & 28	7 / 10 & 15 / 5
808 & 1064 (dual)	400	27 & 28	11 / 10 & 15 / 5
808 & 975 (dual)	400	27 & 50	11 / 10 & 25 / 5
975 & 1470 (dual)	200	30 & 18	15 / 6 & 12 / 7
975 & 1470 (dual)	400	50 & 25	25 / 6 & 21 / 7
760 & 1064 (dual)	1000	45 & 60	20 / 8 & 26 / 7
1064 & 1940 (dual)	400	19 & 8	21 / 5 & 11 / 5
1470 & 1940 (dual)	400	15 & 8	21 / 5 & 11 / 5
670 & 808 (dual)	105	2.5 & 10	1.6 / 8 & 4 / 8
808 & 975 & 1064 (triple)	400	19 & 30 & 28	11 / 6 & 25 / 4 & 15 / 5
670 & 808 & 9xx (triple)	400	5 & 19 & 30	3.5 / 6 & 11 / 6 & 25 / 3.5

Parameter	Symbol / Conditions	Min	Typ	Max	Unit
Other General Features					
Conversion Efficiency		38(30)% (7/8xxnm(670nm)), 45% (9/10xxnm), 25% (14xxnm), 15% (19xxnm)			%
Spectral Shift with Temp. <1100nm	λ _T _Shift		0.3		nm / K
Spectral Shift with Temp. 14xxnm	λ _T _Shift		0.7		nm / K
Spectral Shift with Temp. 19xxnm	λ _T _Shift		1		nm / K
Fiber Centricity			±10 (±5μm for 105μm fiber core)		μm
Numerical Aperture	NA		0.22		
Fiber Connector Type			SMA905		
Pilot Beam (Option)					
Pilot Beam Output Power	red/green - adjustable (6)	0		3	mW
Pilot Beam Wavelength	red/green		650±10 / 520±10		nm
Pilot Beam Operating Voltage	red/green	4/7		5/8	V
Pilot Beam Operating Current	red/green			<35/200	mA
Pilot Beam Intensity Control Voltage	red/green	0(max. Intensity)		5(min. Intensity)	V
Sensors (Options)					
Power Monitor Supply Voltage				12	V
Power Monitor Signal Voltage		0		4(0.5V for 19xxnm)	V
Fiber Detection Sensor Supply Voltage				12	V
Fiber Detection Sensor Signal Voltage		0		12	V
Temperature Sensor			Standard NTC (10k) or optional (PT100 or LM35)		

Notes: * taken at internal temperature sensor, Laser wavelength **880nm - 920nm for any fiber core and 930nm - 1000nm for fiber core <=105(200)μm** require an AR <0.7% (+10nm around peak wavelength) coated fiber facet or end cap on fiber facet module side or power reduction of 30(15)%. Avoid direct feedback from materials like mirrors, optics, processed material etc. back into laser module via the fiber cable by more than 10%.

(1) Power is measured ex fiber according to given fiber specifications including measures and tolerances of fiber and ferrules for uncoated fiber facets (exception see *).

Minimum repeatable power with internal temperature and current accuracy of +0% is <=+3% of maximum power. Please add tolerance of your temperature and current control.

(2) Do not exceed maximum forward current for rated power as given above by more than 5% otherwise the laser diode may be damaged

(3) Rule of thumb: Power ex fiber decreases by app. 5% (<1100nm), 7% (>1400nm) and 12% (>1900nm) every 10 °C temperature increase at internal temperature sensor. Lifetime decreases by about factor of two every 10 °C. Required flatness of customer heat sink 0.05mm over entire bottom surface to achieve necessary contact to the heat sink.

(4) Red and green minimum pilot power is set at factory by customer request. Standard is 3 mW.

(5) Adjust trimpot R6 to set maximum intensity with pin 10 control left open or set to 0.5V


(6) Adjust trimpot R4 to set intensity off with pin 10 control set to 5V

(7) Calculation of the thermal load and necessary thermal resistance of a heat sink to maintain internal diode temperature of 25°C : Thermal load = Output power * (1/conversion efficiency - 1)

Heat sink thermal resistance = (25 °C - ambient temperature) / thermal load

Fiber Connector

- (1) Lumics laser diode fiber coupling technology ensures specified loss into the fiber cladding depending on the fiber core centricity, ferrule diameter and distance of the fiber end facet to the reference plane compliant with the shown technical drawing of the fiber connector
- (2) Free standing fibers suffer from higher risk of fiber damage to the fiber tip due to mechanical stress by handling and the fiber end facet can not be polished as simple as for not free standing fibers.
- (3) Please study the fiber data sheet http://www.lumics.de/wp-content/uploads/lu_fiber_patchcords.pdf and the fiber manual before operation.

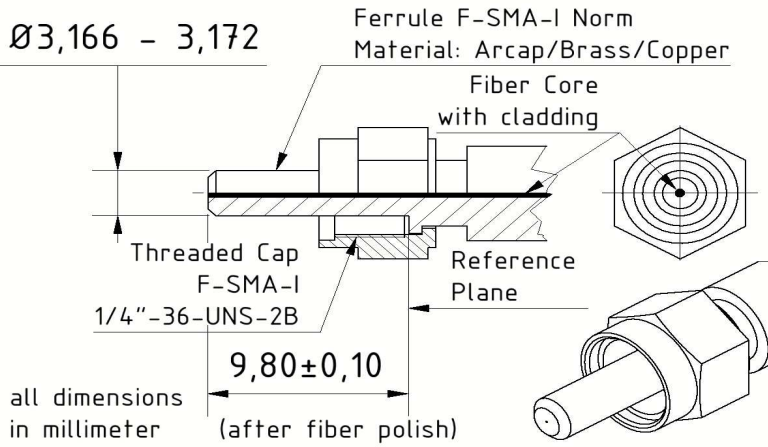

General Parameters / Accessories


Parameter	Symbol	Min	Typ	Max	Unit
Storage Temperature	TS	-10		55	°C
Internal operating * and (Ambient) temp , c.w.-operation **	Top c.w.	10(5)		35(40)	°C
Humidity / Non-condensing Atmosphere				90	%
Thermal heat sink resistance				0.1	k/W
Maximum fiber flange temperature				50	°C
Weight			300		g
Compliance			CE, ROHS		

Further Options (Please ask for quotation if needed)

Optical fiber patchcord, Laser diode drivers for each individual wavelength, Interface cable , OEM laser diode driver and temperature controller

* taken at internal temperature sensor ** we recommend to operate the laser above dew point. Below dew point water condensation on the exit window may damage the window when laser is switched on. If the module was stored below dew point before operation dry the window by pre-heating the module to 25°C

User Safety



Important Note Read and carefully follow operating manual instructions. Especially, whenever power supply is switched on or off, always disconnect from laser module. See manual for details. Uncontrolled on / off switching may cause spikes and result in fatal device damage. This product is not certified by with IEC 60825-1 or 21CFR1040.10/ 21CFR1040.11 and must comply with the applicable regulations by the Purchaser if sold as laser product.

We manufacture diode lasers.